



DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
03.05	0	01	PN-35 (03)	15.03.06	
TECHNICAL SPECIFICATIONS				SIGNATURE  PRESIDENT	

FULL BODY HARNESS WITH WORK POSITIONING BELT PN-35 (03)

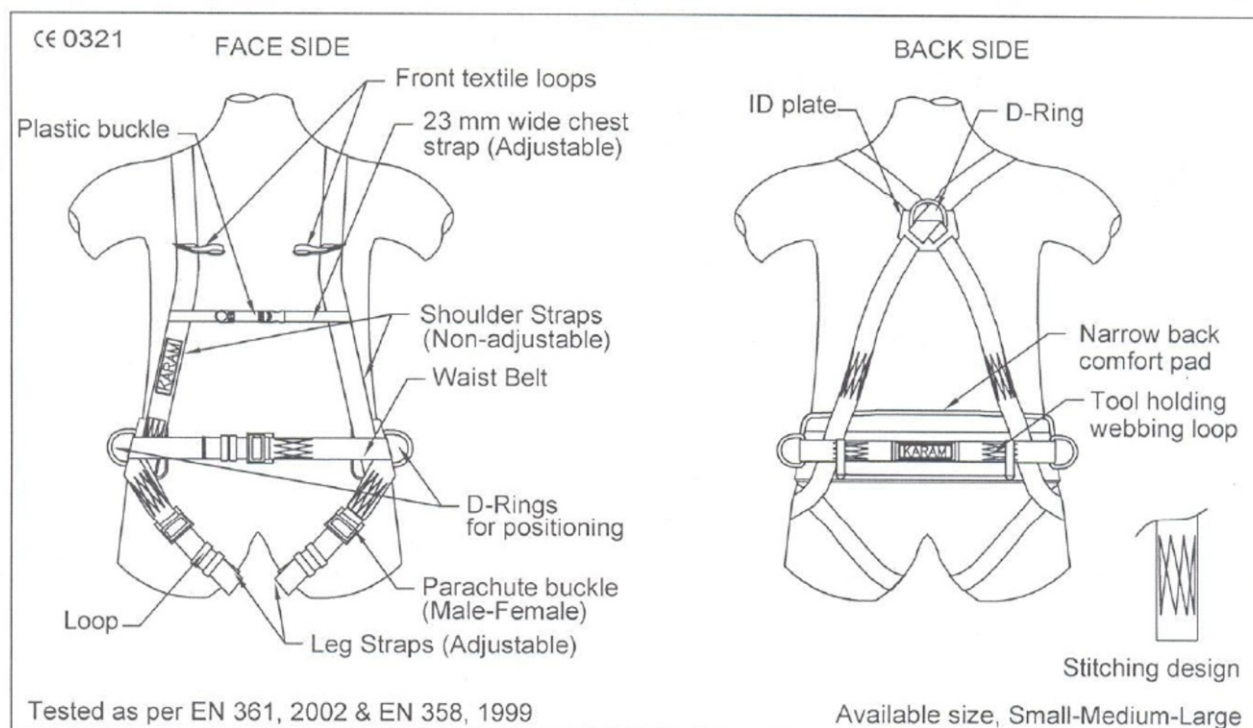

DESIGN

- One dorsal attachment D-ring for fall arrest.
- Two front textile loops for fall arrest
- Two lateral D-rings at waist for positioning.
- Work positioning belt (PN-03) incorporated.
- Adjustable leg straps.
- Adjustable chest strap

WEBBING

- Material : Polyester
- Width : 44±1mm
- Breaking strength : 22 KN (Min) (For Harness)
- Breaking strength : 30 KN (Min) (For Belt)

STITCHING THREAD

- Material : High-tenacity polyamide
- Colour : White

METAL COMPONENTS

- Material : Steel
- Plating : Zinc plated
- Finish : Deburred & Polished

VITAL TEST COMPLIANCE

- Static Strength : 15 KN or 1,530 kgf for 3 Minutes at each attachment element
- Dynamic strength : Free fall from 4 meters height donned to a test dummy weighing 100 kg at each attachment

WEIGHT

- : 1300 gm ±10%