


DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
03.05	0	01	PN-42 (01)	15.03.06	
TECHNICAL SPECIFICATIONS				SIGNATURE	
				PRESIDENT	

## FULL BODY HARNESS WITH WORK POSITIONING BELT PN-42 (01)

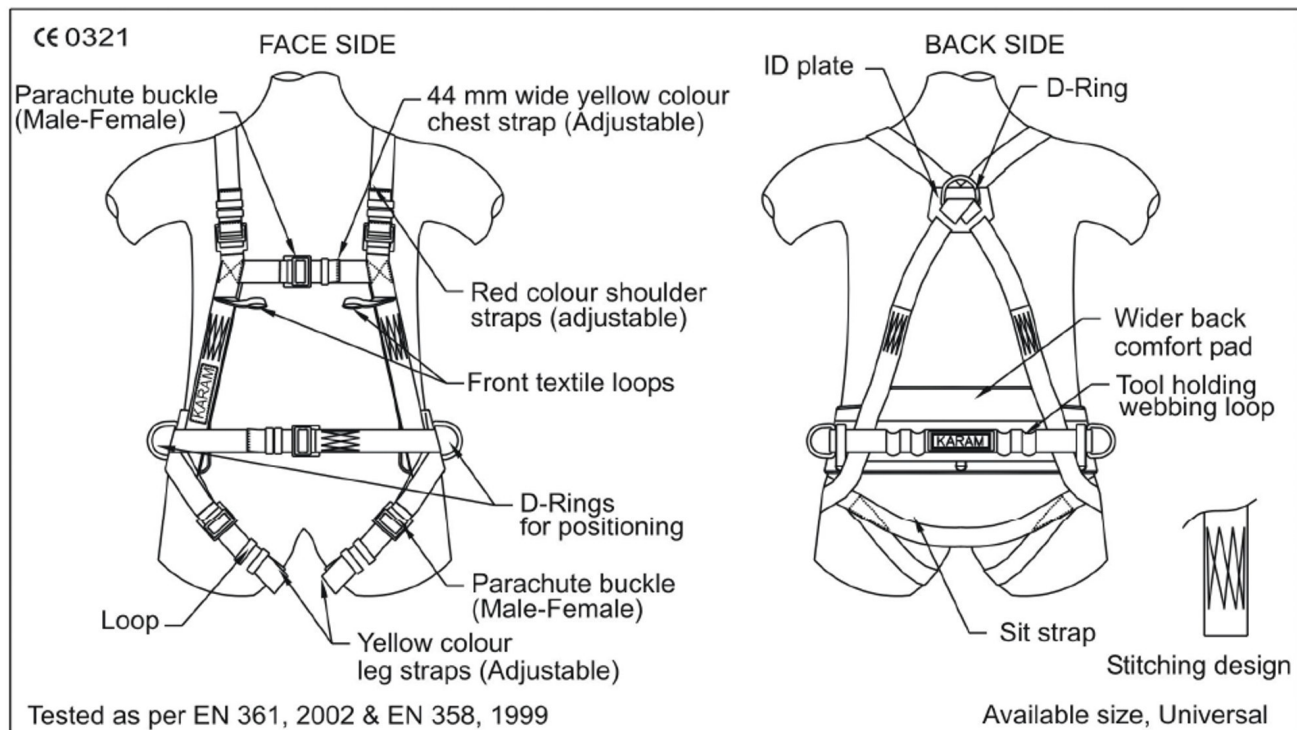

### DESIGN

- One dorsal attachment D-ring for fall arrest.
- Two front textile loops for fall arrest.
- Two lateral D-rings at waist for positioning.
- Work positioning belt (PN-01) incorporated.
- Adjustable shoulder straps.
- Adjustable leg straps.
- Adjustable chest strap
- Sit strap.

### WEBBING

- Material : Polyester
- Width : 44±1mm
- Breaking strength: 25 KN (Min) (For Harness)
- : 30 KN (Min) (For Belt)

### STITCHING THREAD

- Material : High-tenacity polyamide
- Colour : White

### METAL COMPONENTS

- Material : Steel
- Plating : Electro deposited Nickel Chrome
- Finish : Deburred & Polished

### VITAL TEST COMPLIANCE


- Static Strength : 15 KN for 3 Minutes at each attachment element
- Dynamic strength: Free fall from 4 meters height donned to a test dummy weighing 100 kg at each attachment

### WEIGHT

- : 1780 gm ±10%

DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
03.05	0	01	PN-116	15.03.06	
TECHNICAL SPECIFICATIONS				SIGNATURE PRESIDENT	

## SCREW LOCKING ALUMINUM KARABINER (PN-116)

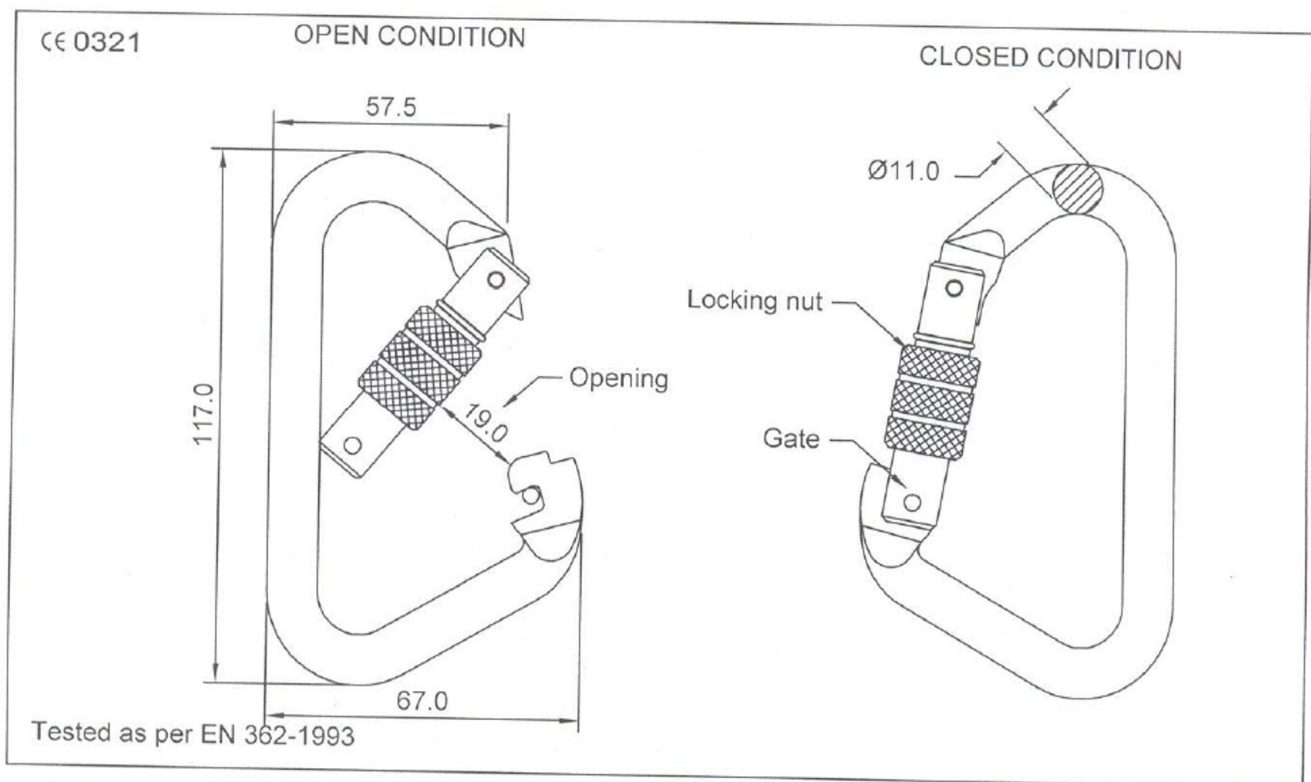

### DESIGN

- Opening 19 mm.
- Oval shaped Karabiner made of Ø11 mm round Bar.
- Self closing & manual locking type Karabiner.
- Locking by screw locking nut

### METALLIC ASSEMBLY

- Made of high strength aluminum alloy.
- Deburred & polished

### SYSTEM STRENGTH

- Greater than 22 KN.

### WEIGHT

- 90 gm  $\pm$  5 gm